

尺寸: 105*148mm

材质: 100g铜版纸, 彩色印刷, 钉装

Blackview

Turn Anywhere Into Cinema

PV1000 Max



INSTRUCTION
MANUAL

Language List

English	Projector Manual
Русский	Руководство по эксплуатации проектора
Español	Manual del Proyector
Deutsch	Projektor-Handbuch
Français	Manuel du Projecteur
Italiano	Manuale del Proiettore
Português	Manual do Projetor
日本語	プロジェクター取扱説明書
Nederland	Projector Handleiding



Scan to access manuals in other languages.

Safety Warning

- * To avoid dangerous or illegal operation, please read the following precautions carefully before using this device.
- * In order to provide the device with stable power supply, select the power supply line that conforms to the national electricity standard and the power sockets for which protective measures are taken, such as grounding.
- * Use the type of power supply indicated on the device.
- * Do not unpack and disassemble the machine by yourself, otherwise we will not undertake any free warranty service.
- * To avoid eyes injury, do not look directly at the projector lens when this device is working.
- * Do not place the device on any items that may block the ventilation openings, such as cloth, blankets, etc.
- * Since this device is not waterproof, avoid getting wet or splashing, and do not place any item containing liquid next to the device, such as the vases, water cups, etc.
- * To prevent electric shock, do not expose the device to rain or water.
- * Unplug the power cord if the device will not be used for a long time.
- * Transport the device with the original foam.
- * Do not try to repair the device by yourself, please contact the dealer if required.
- * Use the product in the environment within temperature of 5° - 35°, and do not use in a place over 2,000 meters sea level.

Statement


- 1) Intellectual property right statement: The hardware design and software of this product are covered by the patents. Anyone who reproduces this product or the content of the instruction without the authorization of the Company shall assume legal liabilities.
- 2) This manual is for reference only, and the actual function of the final product is subject to the actual function of the product received by the customer.
- 3) The picture is for reference only, please refer to the actual product. The company reserves the right to improve and change the appearance and design of the product without notice.

Accompanying Accessories

- Remote control x 1
- Adapterx1

Appearance

Before use, you are required to be familiar with the ports and keys of the device.

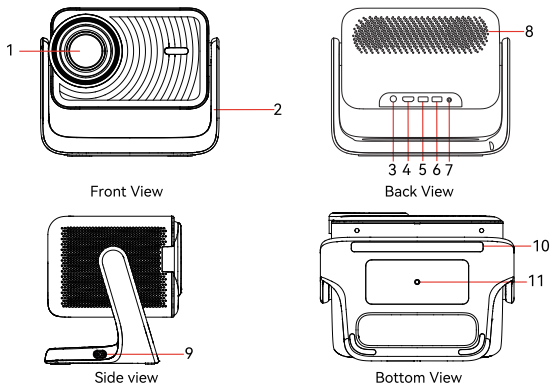

No.	Description	No.	Description
1	Lens	7	Earphone
2	Gimbal	8	Air outlet
3	ON/OFF	9	Power interface
4	HDMI port	10	Foot pad
5	USB port	11	Bracket's screw hole
6	USB port		

Note: To avoid damage to the eyes, do not look at the lens directly when opening.

Projection





Table Mount-Front Projection



Ceiling Mount-Front Projection






Table Mount-Rear Projection



Ceiling Mount-Back Projection

Projector Size Specifications

Picture Size (inch)	Picture Size (cm)
60	132.8*74.7
80	177.1*99.6
100	221.4*124.5
120	265.7*149.4
150	331*186.2

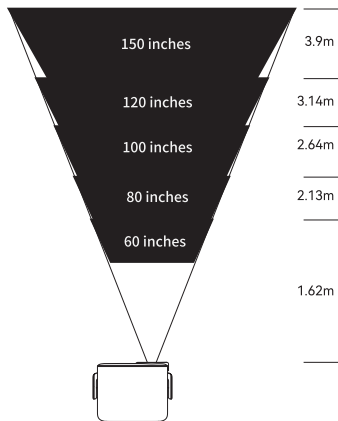

Note: A 100-inch projection size is recommended for optimal results.


Turn the Projector Operation On/Off

* When the projector is connected to a power source, the projector enters standby and the cover signal indicator is red.

* Operation on: Press the power key on the body or the power key on the remote control, the indicator will turn blue and enter the working state.

* Operation off: In the working state, press the power key of the body or the power key on the remote control, the indicator changes from blue to red, and the projector is turned off.

Remote Control

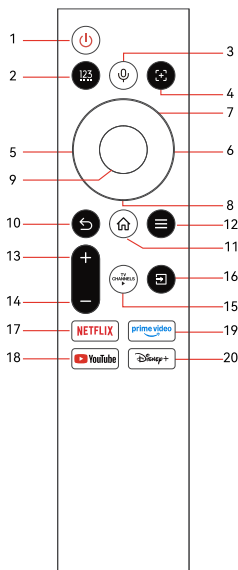

No.	Items	Description
1		ON/OFF
2		Numpad/colorpad
3		MIC
4		Focus
5		Left
6		Right
7		Up
8		Down
9		OK
10		Return
11		Home
12		Set
13		Volume +
14		Volume -
15		TV Channels hotkey
16		Signal source
17		Netflix hotkey
18		Prime video hotkey
19		YouTube hotkey
20		Disney+ hotkey

Use of the Projector

Function tips


When the newly installed projector is used for the first time, the image will be blurred, and it is necessary to focus the picture by Manual Focusing function or Auto Focusing function.

When the projector is not perpendicular to the wall, the projected image will be distorted and not rectangular, requiring adjustment using the Manual Keystone Correction function or Auto Keystone Correction function. You can use the various functions of the projector according to the instructions below.

Manual Focus

When the picture is blurred, press the focus keys "⊕" on the remote control to adjust the focal length of the lens.



(As shown below)

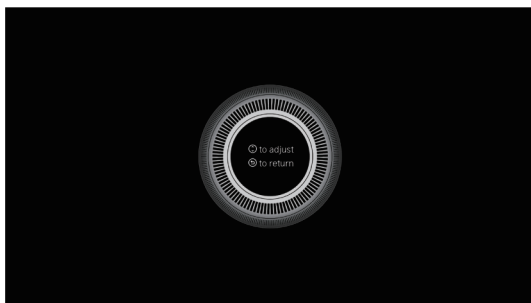

Use of the Projector

Manual Keystone Correction

You can press the all settings -> Projector -> Manual Keystone Correction button to enter the interface. Manually adjust the four corners through the arrow keys until the screen can be corrected.

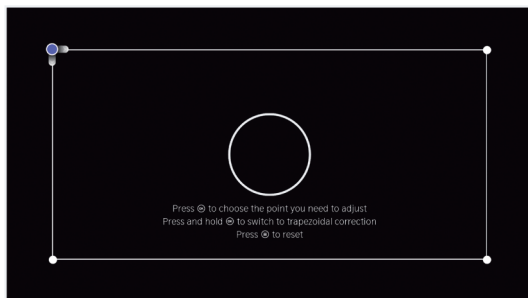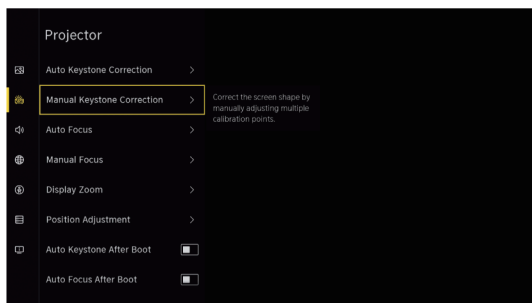


Use of the Projector

Auto Focus

This function is turned on by default, and the screen can be kept clear even after the device is displaced.


(Only available in auto version)

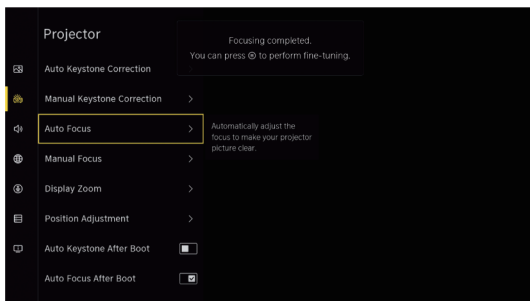

Auto Keystone Correction

This function is turned on by default, and the screen can be kept square even after the device is displaced.

(Only available in auto version)


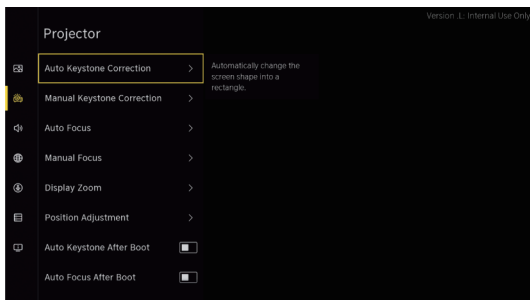


Use of the Projector

Zoom screen

You can press the all settings -> Projector -> Display Zoom button to enter the interface.

Then follow the on-screen instructions to adjust the size or position of the projected image.

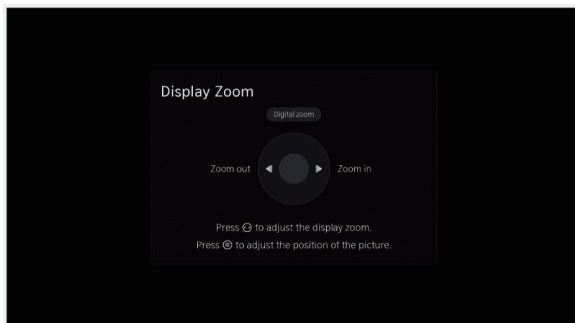
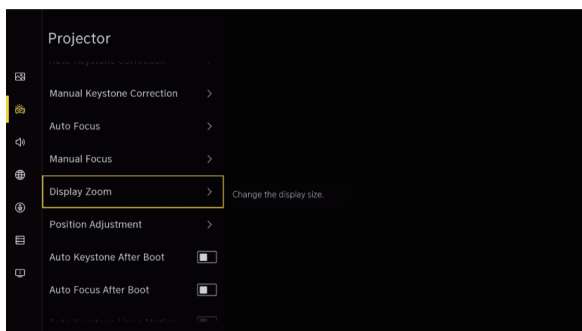


Use of the Projector

How to Use Airplay 2

In the main interface, select "Airplay" to enter the interface, and then switch Airplay to ON.

1. The iOS device and the projector are connected to the same network
2. Open the control center of the iOS device and select Screen mirroring
3. Choose the corresponding projection device name.

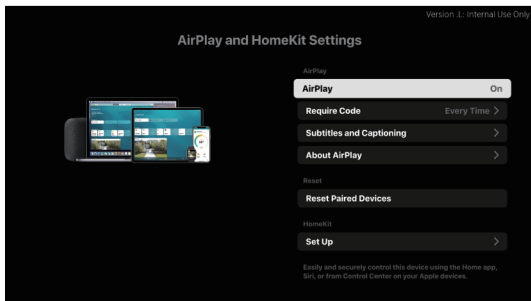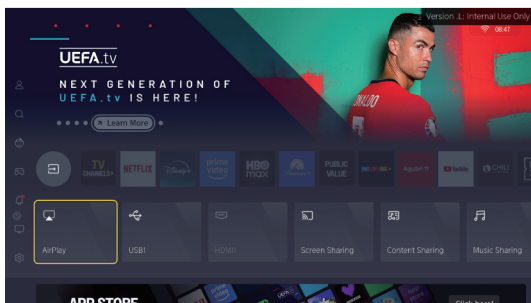


Use of the Projector

How to Use Miracast

In the main interface, select "Screen Sharing" to enter the interface, and then follow the on-screen instructions.

1. Connect your mobile device to the Wi-Fi network.
2. Select the "Cast" function on your mobile device.
3. Select your Device name to connect your phone/PC to the Device.


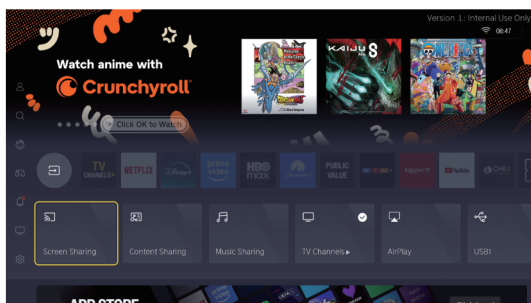


Use of the Projector

How to Use Content Sharing

In the main interface, select "Content Sharing" to enter the interface, and then follow the on-screen instructions.



1. Make sure your Device are connected to the same network.
2. To enable file sharing, go to the device Network and Sharing settings.
3. If you want to mirror the display, go to Input -> Screen Sharing.

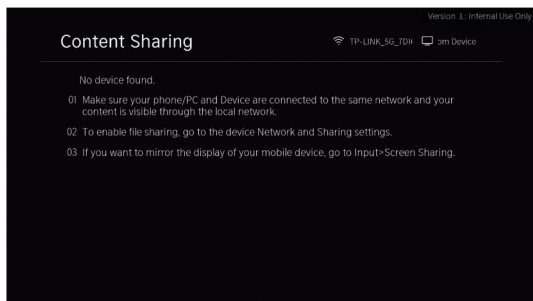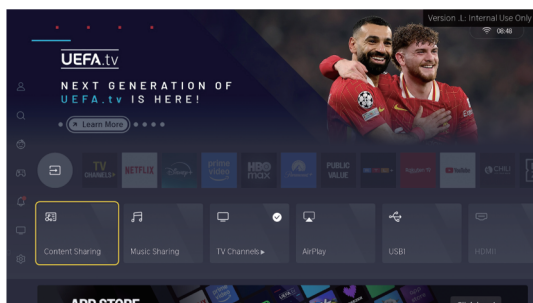

Use of the Projector

How to connect to a wireless network

Please enter the settings interface, select Network -> Network Connections -> Connection Type -> Wireless, and then choose your network option to connect.

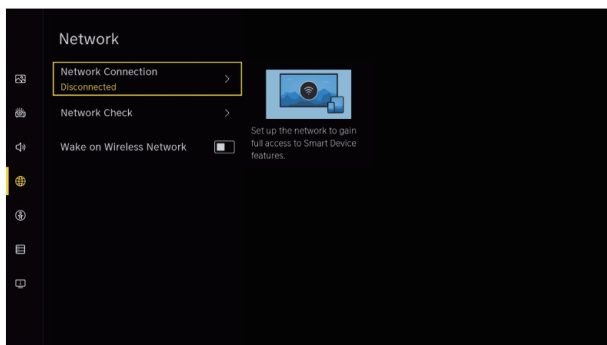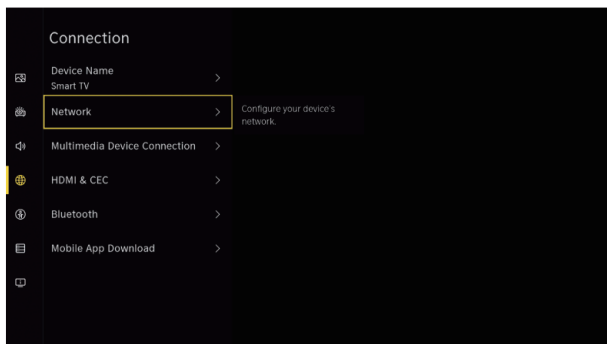

Use of the Projector

Network Connection

Connection Type



Off



Network Connection

Connection Type



Wireless



Refresh

Advanced Settings

Add



lyf

WPA/WPA2



test_wifi

WPA/WPA2



wilson

WPA/WPA2




SCCSI0F

WPA2

Use of the Projector

How to connect your Bluetooth speaker

Connect your smart device to your device using its Bluetooth menu to play music.

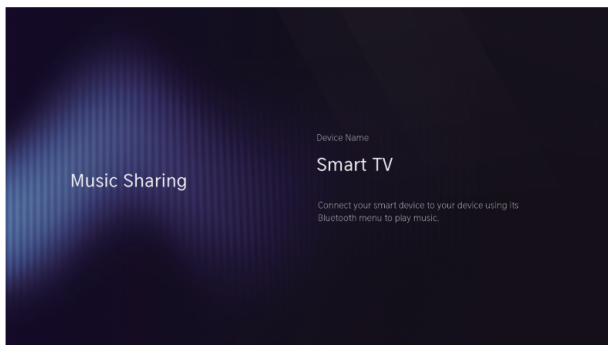

Note: The remote control has two configurations - infrared and Bluetooth. If it's a Bluetooth remote control, pairing is necessary. Pairing method: Enter the Bluetooth setting interface, turn on Bluetooth, and place the remote control near the projector.

Hold down the "●" buttons on the remote control until the indicator light blinks. "Remote Control" will appear on the list of Bluetooth devices, select it and pair.



Manufactured under license from Dolby Laboratories. Dolby, Dolby Audio, and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation.

This product contains technology subject to certain intellectual property rights of Microsoft. Use or distribution of this technology besides of this product is prohibited without the appropriate license(s) from Microsoft. Content owners use Microsoft PlayReady™ content access technology to protect their intellectual property, including copyrighted content. This device uses PlayReady technology to access PlayReady-protected content and/or WMDRM-protected content. If the device fails to properly enforce restrictions on content usage, content owners may require Microsoft to revoke the device's ability to consume PlayReady-protected content. Revocation should not affect unprotected content or content protected by other content access technologies. Content owners may require you to upgrade PlayReady to access their content. If you decline an upgrade, you will not be able to access content that requires the upgrade.

The camera on the device will collect projection screen information when performing autofocus and auto keystone function, and the information will be released afterwards. Such information shall not be saved or uploaded.

■ CE Caution:

- Restrictions in the 5 GHz band:

According to Article 10 (10) of Directive 2014/53/EU, the packaging shows that this radio equipment will be subject to some restrictions when placed on the market in Belgium (BE), Bulgaria (BG), the Czech Republic (CZ), Denmark (DK), Germany (DE), Estonia (EE), Ireland (IE), Greece (EL), Spain (ES), France (FR), Croatia (HR), Italy (IT), Cyprus (CY), Latvia (LV), Lithuania (LT), Luxembourg (LU), Hungary (HU), Malta (MT), Netherlands (NL), Austria (AT), Poland (PL), Portugal (PT), Romania (RO), Slovenia (SI), Slovakia (SK), Finland (FI), Sweden (SE), the Turkey (TR), Norway (NO), Switzerland (CH), Iceland (IS), and Liechtenstein (LI).

The WLAN function for this device is restricted to indoor use only when operating in the 5150 to 5250 MHz frequency range.

	ES	LU	RO	CZ	FR	HU	SI
	DK	HR	BE	BG	DE	EE	IE
	EL	IT	CY	LV	LT	SK	MT
	NL	AT	PL	PT	FI	SE	TR
	NO	CH	IS	LI			

- Declaration: Our equipment which support 5G Wi-Fi all meet the above EU Standards. Otherwise, they do not meet the above standards.
The object of the declaration described above is in conformity with the essential requirements of the relevant Union harmonization legislation: Radio Equipment Directive RED (2014/53/EU).

■ FCC STATEMENT:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NoTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

■ISED Statement

English: This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s).

Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

The digital apparatus complies with Canadian CAN ICES-3(B)/NMB-3(B).

French: Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux RSS exemptés de licence d'Innovation, Sciences et Développement Économique Canada.

L'exploitation est soumise aux deux conditions suivantes:

(1) Cet appareil ne doit pas provoquer d'interférences.

(2) Cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil.

L'appareil numérique du ciem conforme canadien peut - 3 (b) / nmb- 3 (b).

This device meets the exemption from the routine evaluation limits in section 6.6 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 6.6 du Cnr - 102 et conformité avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs rf et la conformité.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.


Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et votre corps.



after-sales service



Instagram



Facebook

Manufacturer: Shenzhen Doke Communication Co., Ltd
Address: No. 1301-1302, Block B, Weidonglong Business Building,
No. 2113 Meilong Avenue, Qinghua Community, Longhua Street,
Longhua District, Shenzhen, China



Follow Blackview communtiy, a place where you
can share and discuss with Blackview user
keep posted with most up-to-day news